


INPRO/SEAL™

PS AIR MIZER - ARTICULATING

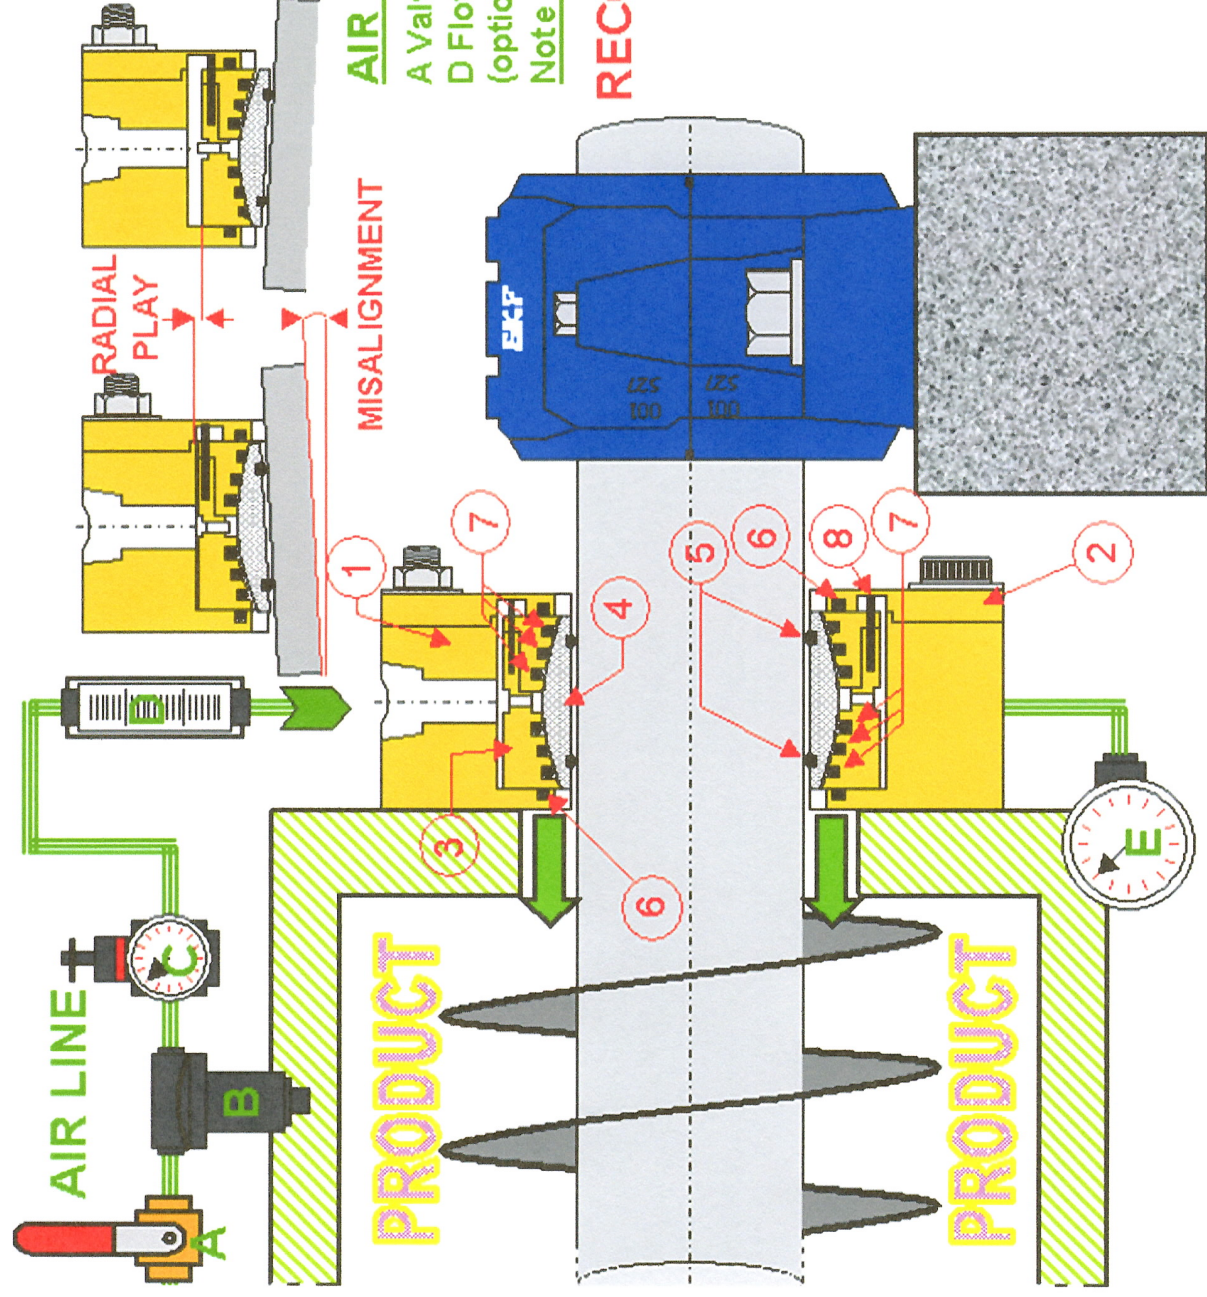

- 1 STATOR (Flange)
- 2 STATOR (Bolted on piece #1)
- 3 INTERNAL STATOR
- 4 SLEEVE (Knee)
- 5 DRIVE RINGS
- 6 RULON BUMPERS
- 7 TEFLON SKATES
- 8 ANTI ROTATION PIN

AIR LINE RECOMMENDATIONS

A Valve – B Filter – C Pressure regulator
D Flow Meter – E Pressure gauge
(optional but recommended).

Note : All the line in ½"

RECOMMENDED OPERATING CONDITIONS

Continuous Temperature limit:
- 35°C to + 205°C

Maximum Shaft runout:

± 3 mm *

Maximum shaft misalignment:

5° *

Maximum axial movement:

15 mm *

Maximum shaft surface speed:

61 M/sec

* More if requested