


# INPRO/SEAL™

## "VBXX-D"® CODE 1987

- 1 ROTOR
- 2 STATOR
- 3 "VBX" RING
- 4 ROTOR DRIVE RING
- 5 STATOR GASKET
- 6 EXPULSION PORT
- 7 "D" OIL GROOVE
- 8 LUBE RETURN
- 9 LOCATION RAMP

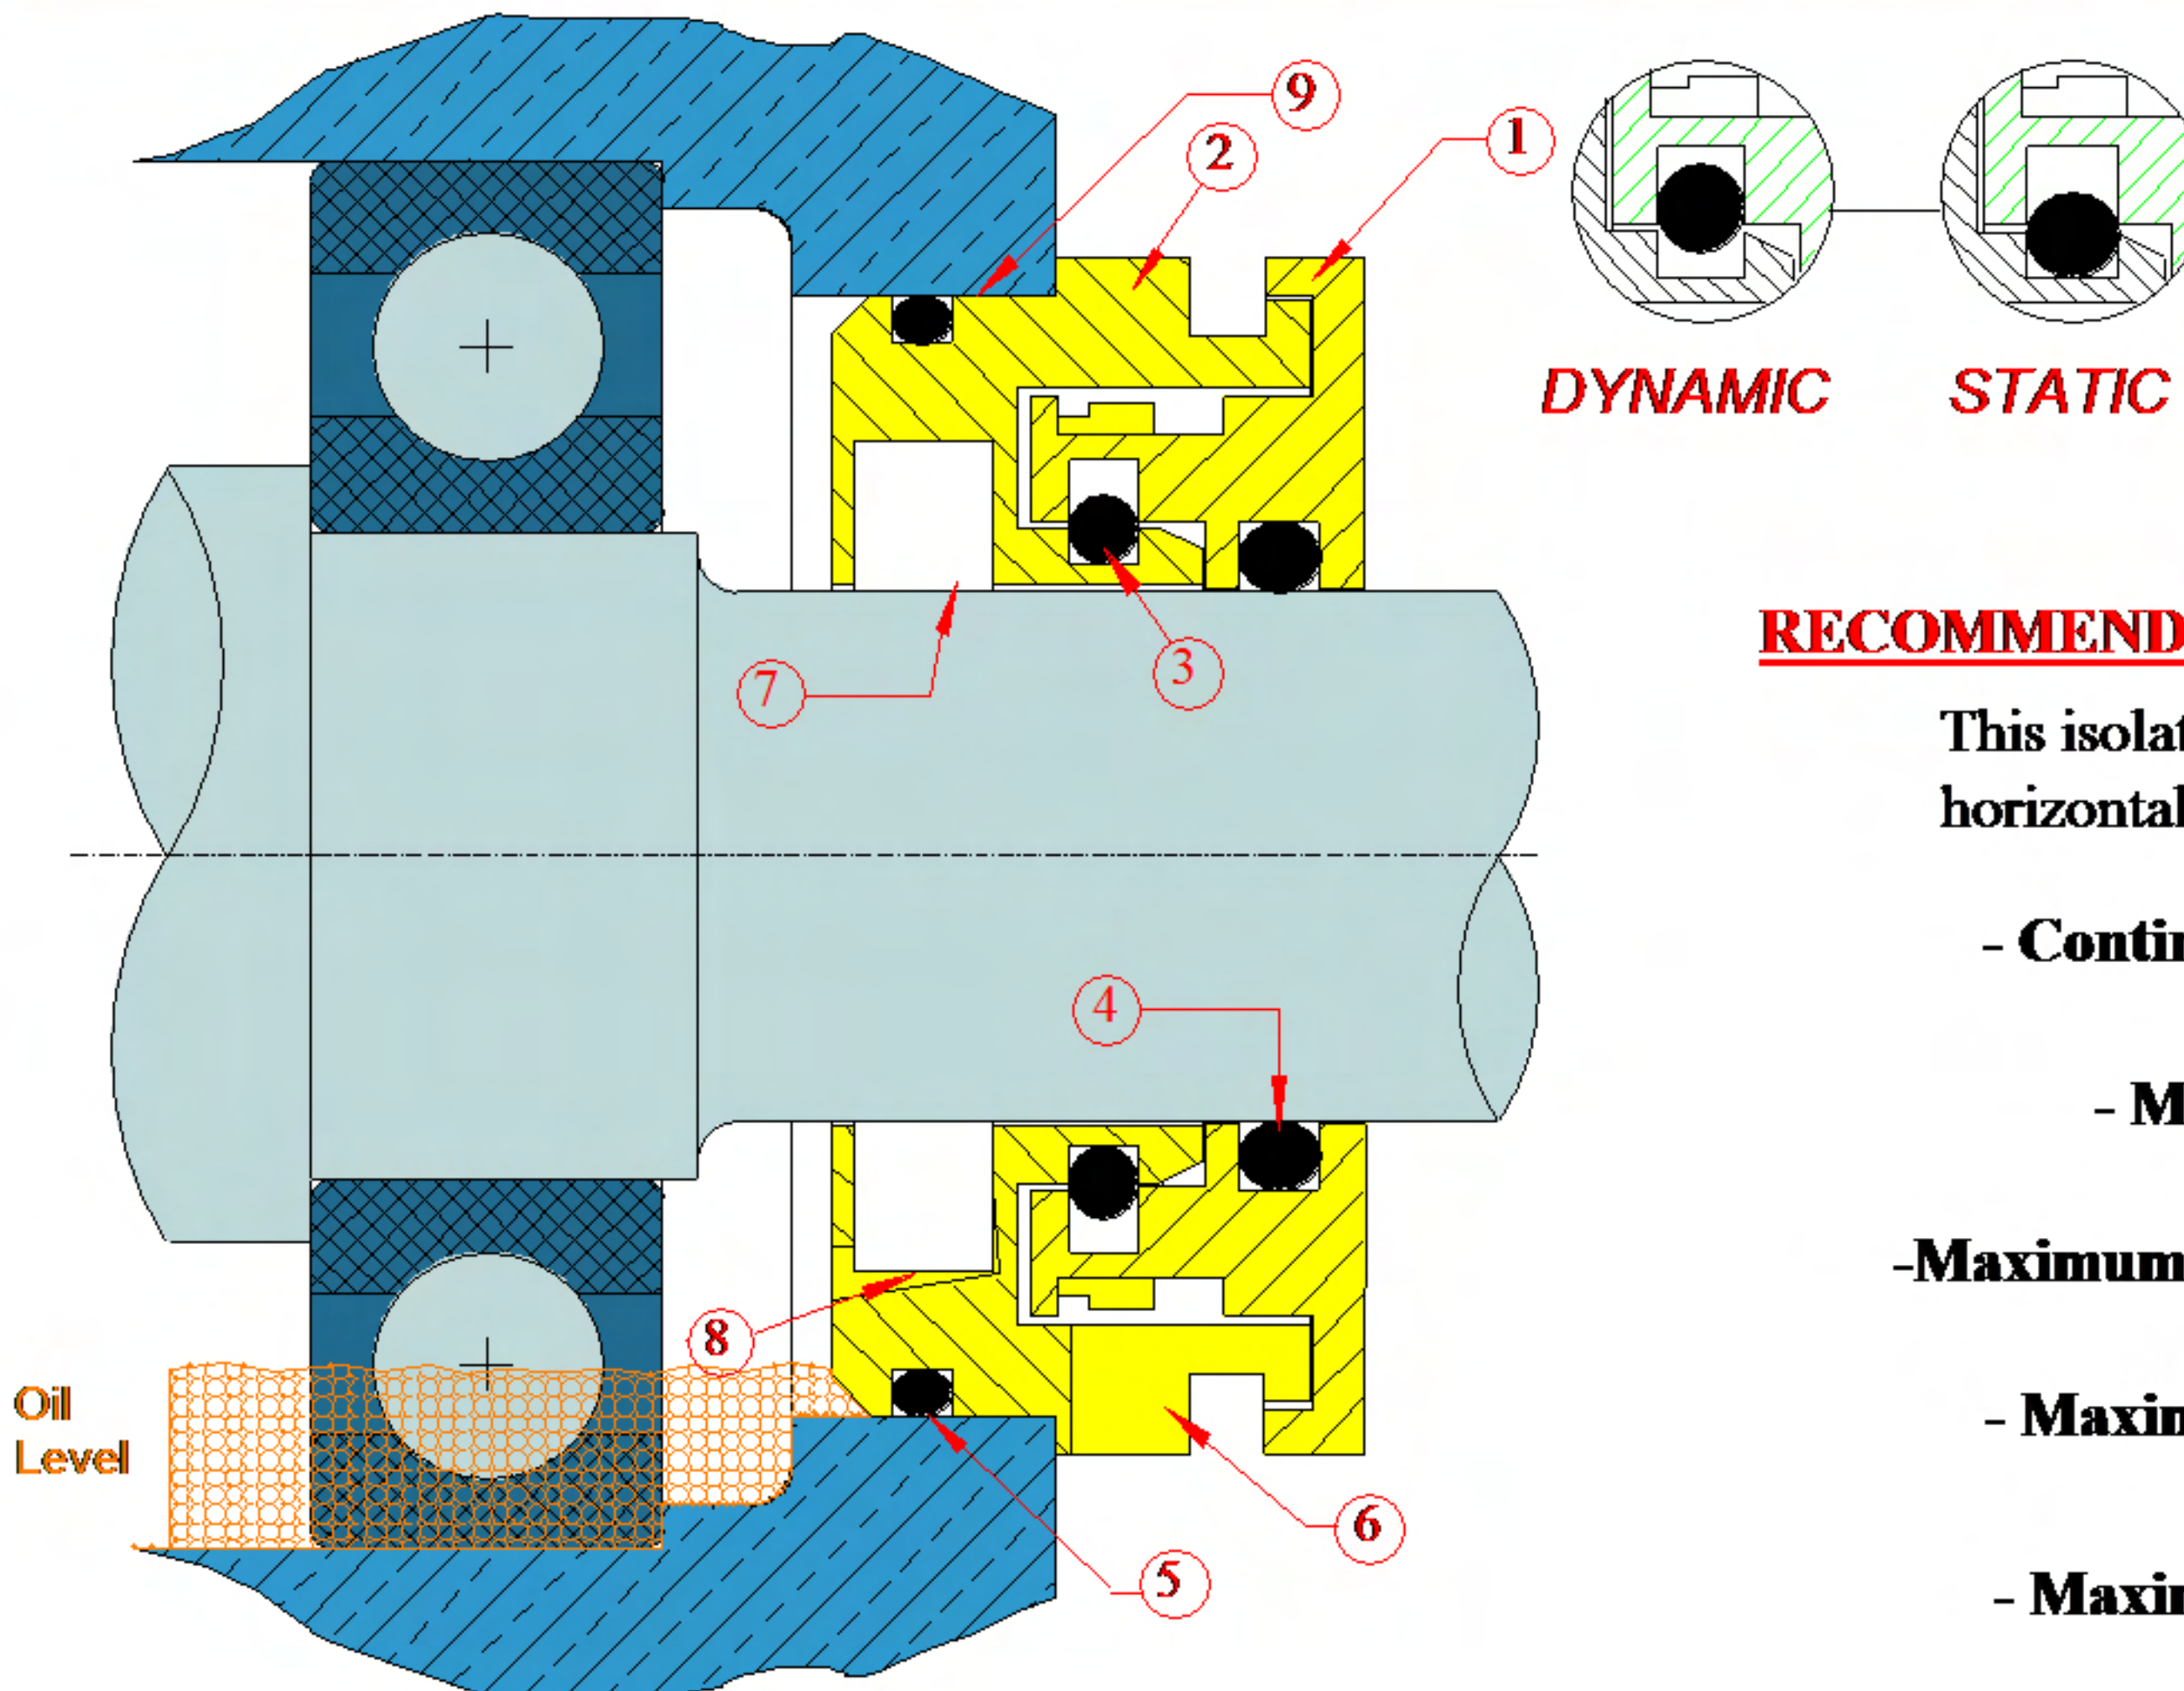

### RECOMMENDED OPERATING CONDITIONS

This isolator is designed to operate in a horizontal attitude with a rotating shaft.

- **Continuous Temperature Limit :**  
- 35 °C à + 205 °C

- **Maximum Shaft runout :**  
± 0,13 mm

- **Maximum shaft-to-bore misalignment :**  
0,18 mm

- **Maximum shaft axial movement :**  
0,25 mm

- **Maximum shaft surface speed :**  
61 M/sec.